




ENGINEERED TO PERFORM. DESIGNED TO **OUTLAST.®**

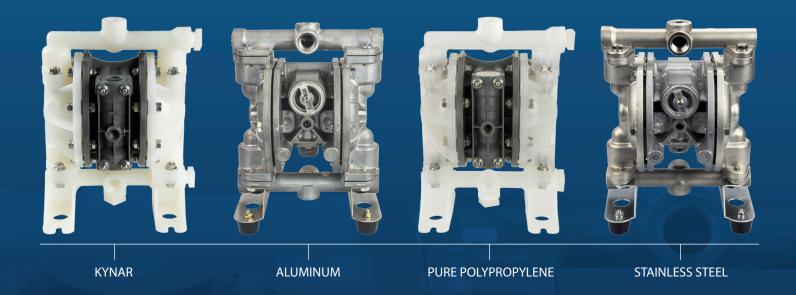

The new G15 Series Pumps are designed to provide maximum performance, while maintaining the reliability that you've grown accustomed to from Yamada. These 1/2" pumps are perfect for spraying and dispensing applications, particularly when on and off cycling reliability is critical. Utilizing our new Step Spool (S-Spool), the G15 uses up to 30% less air than the competition. Maintenance is also a breeze with fewer removeable parts.

Find out today why our motto is "The Proof's in the Pump®"!

FEATURES & BENEFITS

- No lubrication required
- Stall-Free / S-Spool design
- Fewer wearing parts
- Ease of Repair Quick teardown and Rebuild
- 30% less air consumption over competitor's pumps
- Perfect for dispensing and spraying applications
- Critical reliability for On/Off cycling
- No pilot valve

APPLICATIONS:
























G15 Series


1/2" Port Size 16.6 GPM

Stall-Free **Operation**

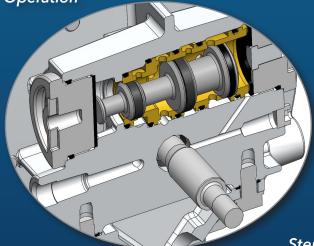

Step-Spool

FEWER Parts. **INCREASED** Reliability.

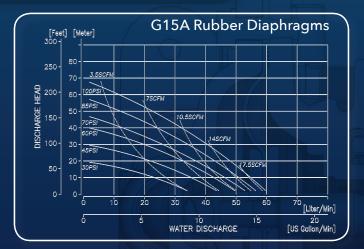

YamadaPump.com Toll Free (800) 990-7867

Yamada® is a registered trademark of Yamada America, Inc. The Proof's in the Pump® is a registered Yamada* is a registered trademark of Yamada America, Inc. The Proof's in the Pumps is a registered trademark of Yamada America, Inc. The Proof is in the Pumps is a registered trademark of Yamada America, Inc. SolidPro* Designed to Pump Fluids Containing Solids is a registered trademark of Yamada America, Inc. Xtreme Duty Pro XDP* is a registered trademark of Yamada America, Inc. InkPRO* is a registered trademark of Yamada America, Inc. Santoprene* is a registered trademark of Monsanto Co. Hytrel* is a registered trademark of Monsanto Co. Hytrel® is a registered trademark of Monsanto Co. Hytrel® is a registered trademark of El. du Pont de Nemours and Company. Kynar® is a registered trademark of Arkema. Nordel™ is a trademark of DuPont Dow Elastomers. Ryton® is a registered trademark of Chevron Phillips Chemical Company. Viton® is a registered trademark of DuPont Performance Elastomers. Step Spool (S-Spool) C.L. 3/2/2017.

TECHNICAL SPECIFICATIONS

Maximum Flow Rate ! 16.6 GPM Port Size ! Air Supply Pressure Liquid Temperature 1 Body Material :

Stainless Steel, Kynar® & Pure Polypropylene Maximum Air Consumption 24.7 SCFM Maximum Size Solid 1/32" (1 mm) 1/4 "Female NPT Air Inlet ! Discharge Volume Per Cycle ! 0.040-0.050 Gallons

ELASTOMERIC OPTIONS


1/2" Female NPT

Aluminum (AL),

20-100 PSI

32-212°F

- PTFE
- Buna N
- Santoprene®

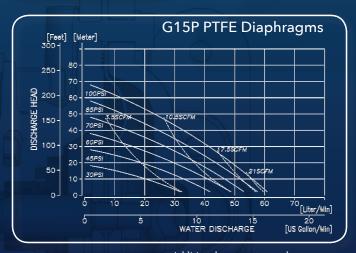

Additional curves at yamadapump.com.

Local Distributor:

Form# G15Y0621